




STARLINK | MINI SPECIFICATIONS

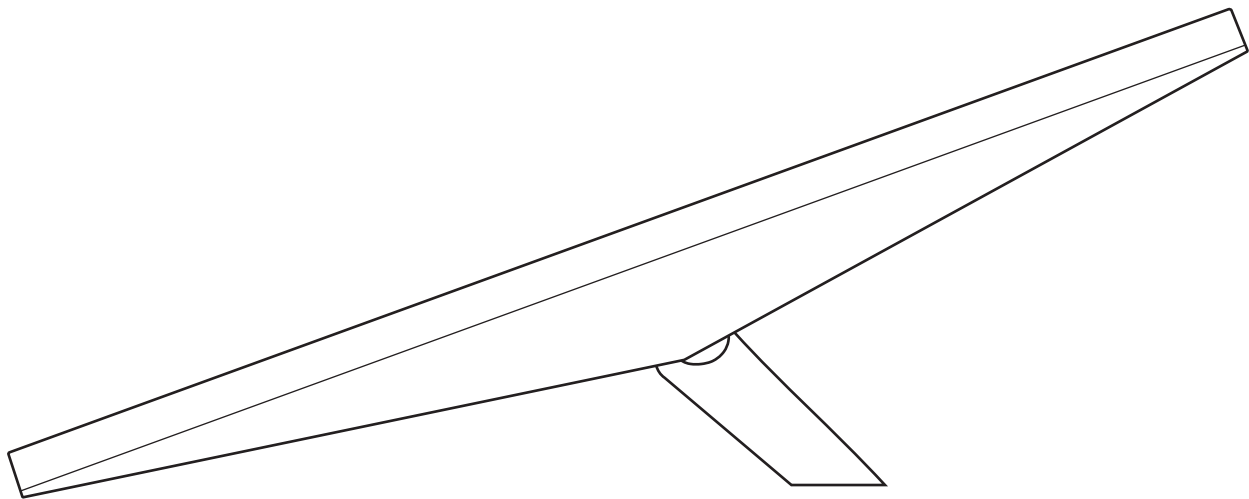


What's In The Box

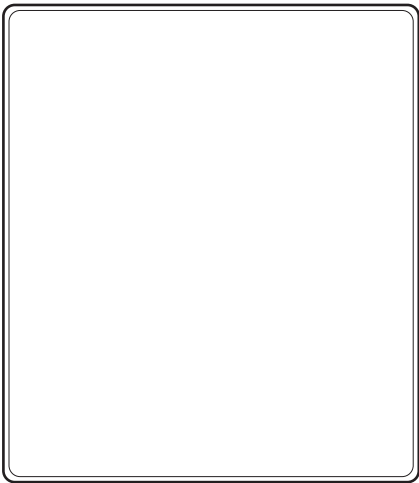


Starlink with Integrated WiFi

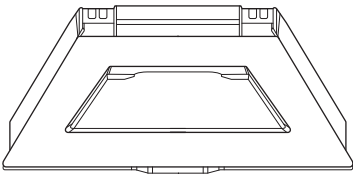


Kickstand



Pipe Adapter and Flat Mount



DC Power Cable
15 m
(49.2 ft)




Power Supply




Starlink Plug


Package Weight: 2.89 kg (6.37 lbs)

Package Dimensions: 430 x 334 x 79 mm (16.92 x 13.14 x 3.11 in)

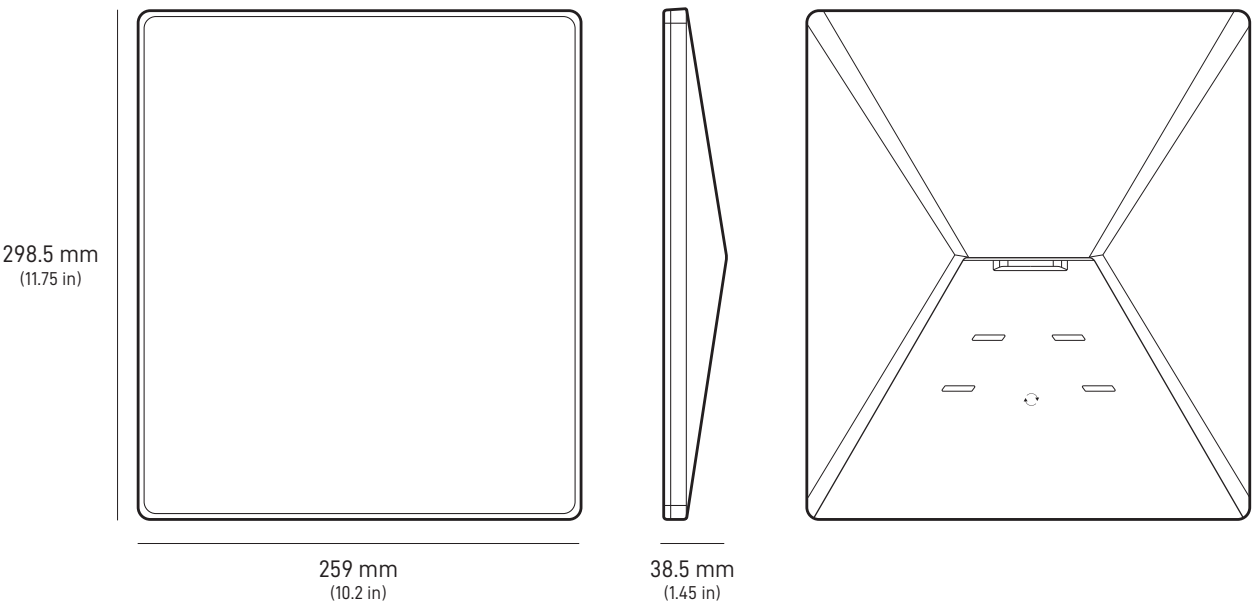


| | |
|------------------------------|--|
| Antenna | Electronic Phased Array |
| Field of View | 110° |
| Orientation | Software Assisted Manual Orienting |
| Weight | 1.10 kg (2.43 lb) 1.16 kg (2.56 lb) with Kickstand 1.53 kg (3.37 lb) with Kickstand & 15 m Cable |
| Environmental Rating | IP67 Type 4 with DC Power Cable and Starlink Plug/Cable installed |
| Operating Temperature | -30°C to 50°C (-22°F to 122°F) |
| Wind Speed | Operational: 96 kph+ (60 mph+) |
| Snow Melt Capability | Up to 25mm / hour (1 in / hour) |
| Power Consumption | Average: 25-40W |
| Input Rating | 12-48V 60W |
| USB PD Requirement | 100W, 20V/5A Minimum (with Starlink USB-C to Barrel Jack Cable Accessory) |


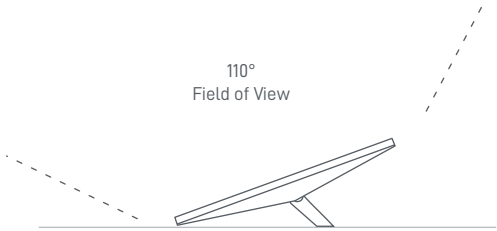




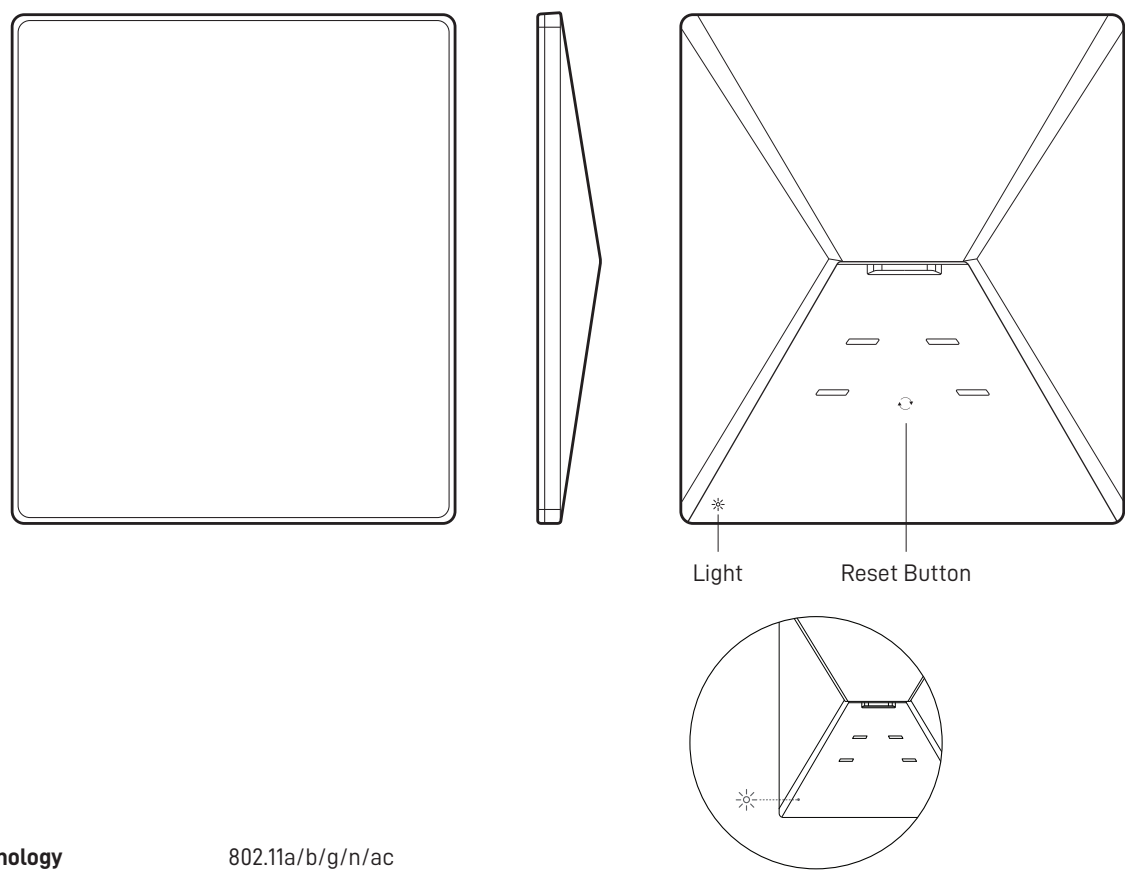




| | |
|--------------------|---|
| Wi-Fi Technology | 802.11a/b/g/n/ac |
| Generation | WiFi 5 |
| Radio | Dual Band 3 x 3 MU-MIMO |
| Ethernet Ports | One (1) Latching Ethernet LAN port with Starlink Plug |
| Coverage | Up to 112 m ² (1,200 ft ²) |
| Security | WPA2 |
| Power Indicator | LED rear face plate, lower left corner |
| Mesh Compatibility | Compatible with all Starlink mesh systems *Not compatible with 3rd party mesh systems |
| Devices | Connect up to 128 devices |

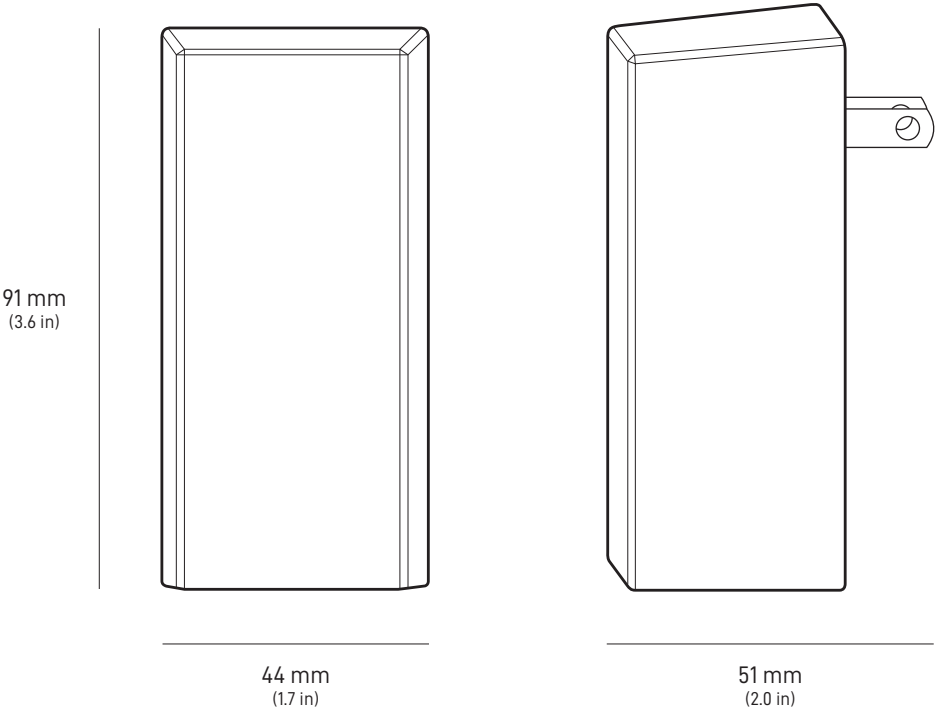

| | |
|-----------------------|--|
| Product Dimensions | 91 x 44 x 51 mm (3.6 in x 1.7 in x 2.0 in) |
| Weight | 0.2 kg (0.44 lbs) |
| Environmental Rating | IP66 Type 4 |
| Operating Temperature | -30°C to 50°C (-22 to 122°F) |
| Power Specifications | 100-240V ~ 1.6A 50 - 60 Hz |

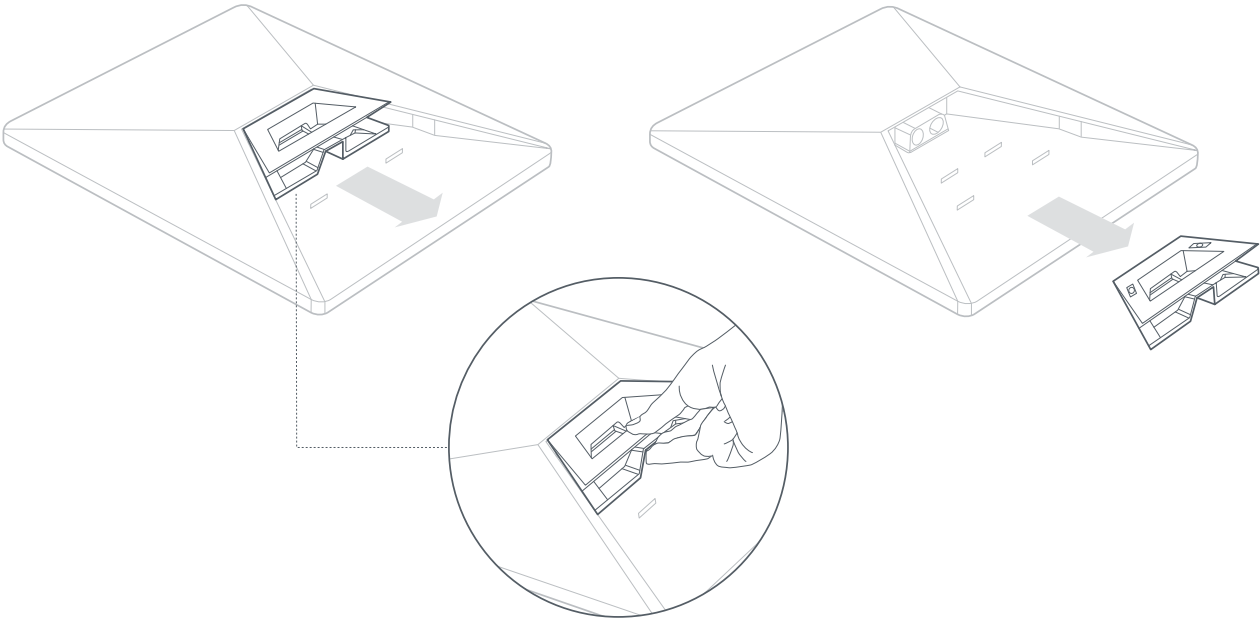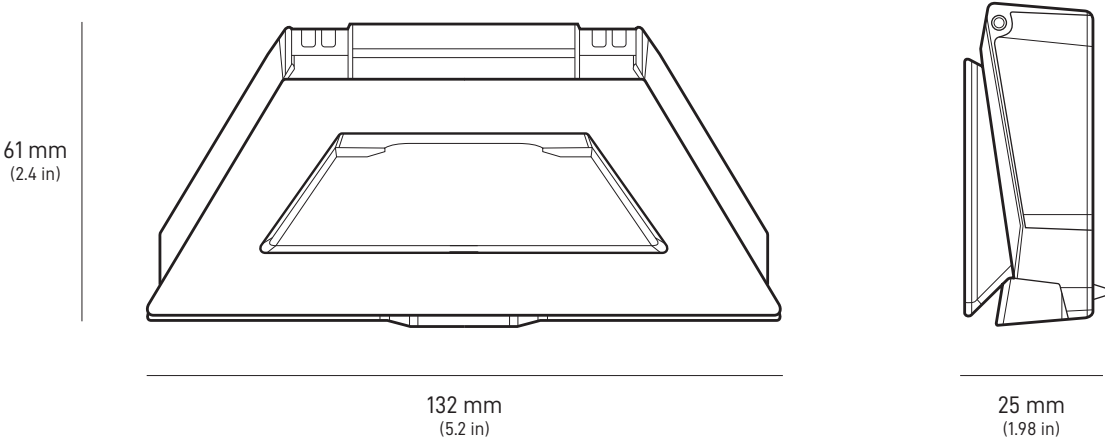

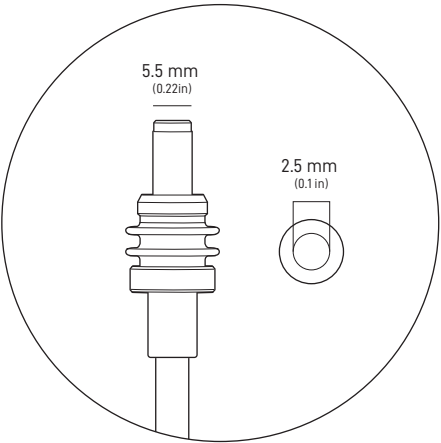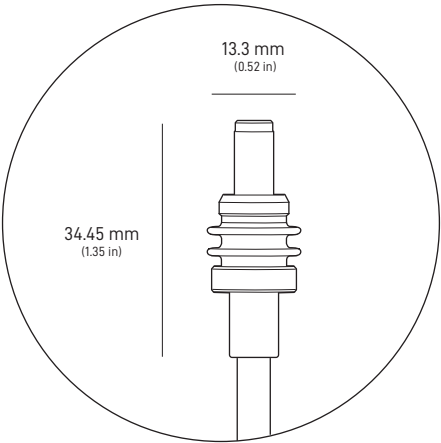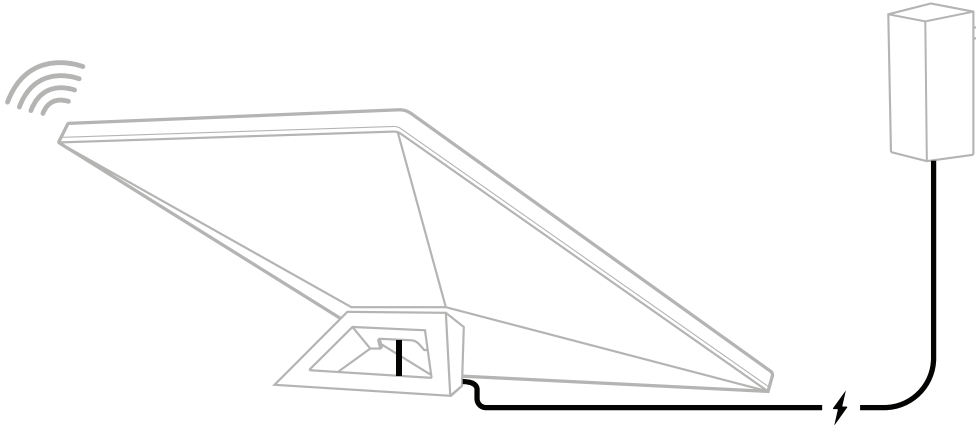

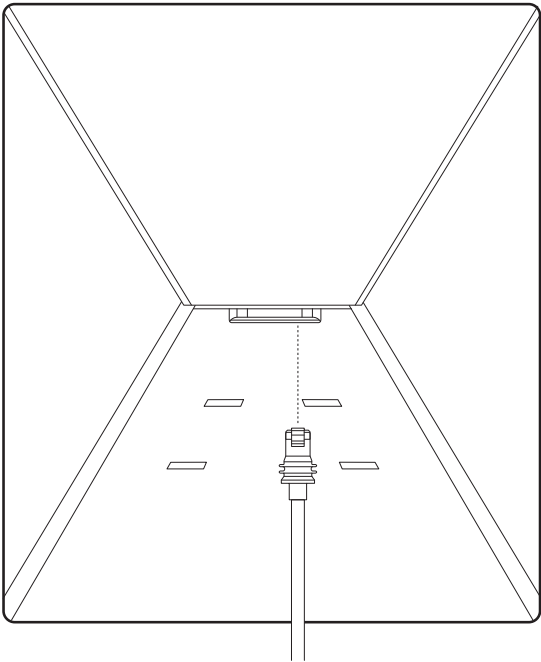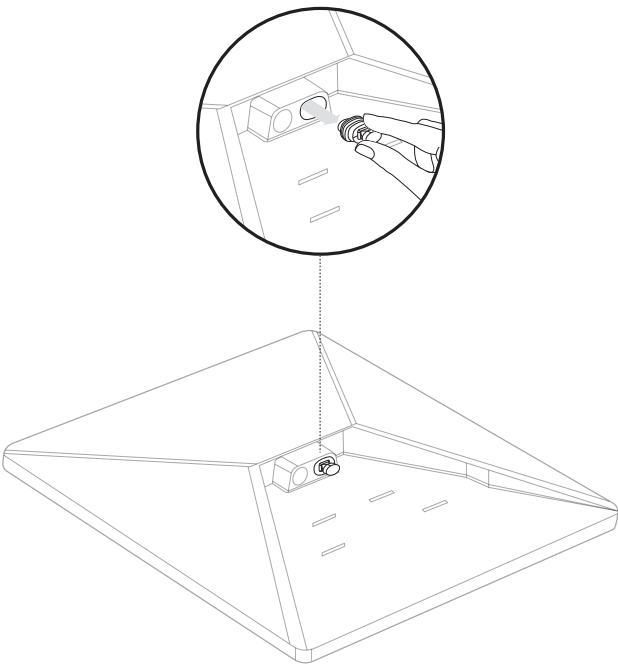

*Mini Starlink Cable not included. Available on shop.starlink.com.
This product is no longer rated IP67 with a standard RJ45 cable.

PIPE ADAPTER AND FLAT MOUNT

